


EV78 BEAMS



LIGHTWEIGHT.
HEAVY DUTY ALUMINIUM

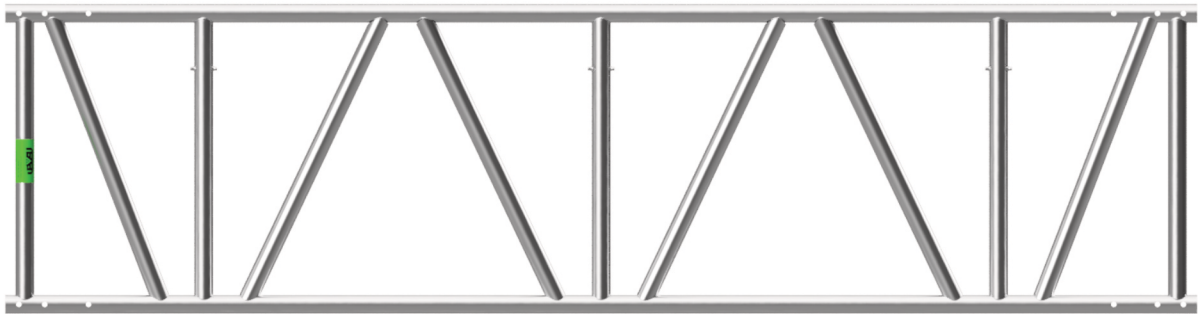

FEATURES

Available in 0.5, 1.0, 2.0, 3.0, 4.0, 5.0 and 6.0m lengths

18 & 36 degree ridges to form pitched roof

Wall & floor brackets to suit

48.3mm scaffold tube sized top & bottom chords, vertical and diagonal posts

Design registered, unique locating pin for system brace retention

Flat pack beam alignment for stacking & transportation

WHY CHOOSE EV78?

High strength to weight ratio

Strongest 70-80cm range beam in the market

Suitable for use with standard scaffold couplers


Suitable for use with traditional Tube & Fitting and any system scaffold

USE FOR:


- Large beam spans
- Heavy duty bridging
- Large span temporary roofs
- Suspended platforms
- Cantilever support
- Staging and lighting
- Forming self-bracing box

PRODUCT SPECIFICATION

EV78



PART	EV078_0500
DESCRIPTION	EV78 aluminium beam 0.5m
WEIGHT [KG]	4.7



PART	EV078_1000
DESCRIPTION	EV78 aluminium beam 1.0m
WEIGHT [KG]	8.2



PART	EV078_2000
DESCRIPTION	EV78 aluminium beam 2.0m
WEIGHT [KG]	14.6



PART	EV078_3000
DESCRIPTION	EV78 aluminium beam 3.0m
WEIGHT [KG]	20.3



PART	EV078_4000
DESCRIPTION	EV78 aluminium beam 4.0m
WEIGHT [KG]	26.1



PART	EV078_5000
DESCRIPTION	EV78 aluminium beam 5.0m
WEIGHT [KG]	31.8



PART	EV078_6000
DESCRIPTION	EV78 aluminium beam 6.0m
WEIGHT [KG]	37.5



PART NO.	EVQR12_60
DIMENSIONS	OD12 x 60
DESCRIPTION	Spring pin
WEIGHT [KG]	0.08



PART	BS0006H
DIMENSIONS	OD38.1 x 496
HOLES REQ.	3 per side
DESCRIPTION	6 hole joining spigot
WEIGHT [KG]	1.2